


MONUMENT RECORD

Corner ID: **Wash_D03**

Sixteenth Corner

Section 6- T10N-R01W, 2nd P.M.



Washington Township, Monroe County, Indiana



MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)

(#10376) 0.4' north-south by 0.35' east-west cut Limestone found with a cross across its entire top, which is 0.3' above ground. A 1.8' tall steel post was observed against the Stones Southwest corner and a Steel post with Monroe County witness sign facing Northeast was set 0.4' South of the Stone.

MONUMENT LOCATION SKETCH:

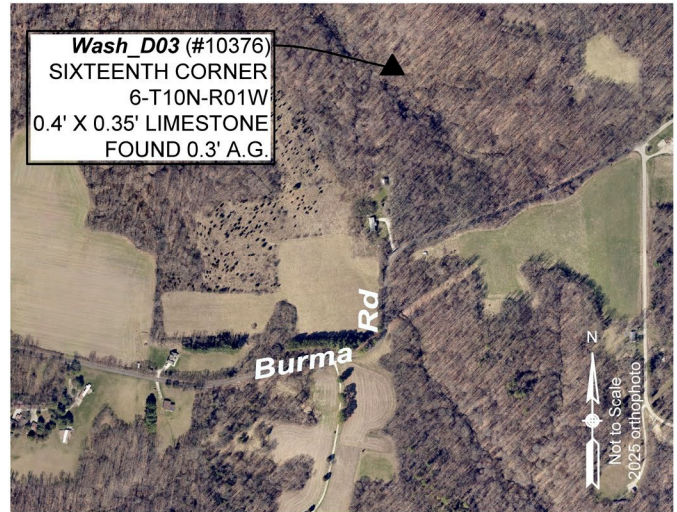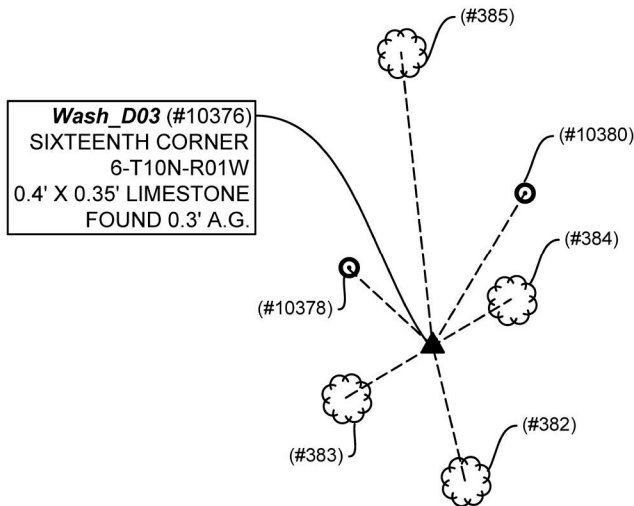

WITNESS MONUMENT TIES: Describe at least three new BT's (Bearing Trees) and/or witness objects established or work done to preserve existing evidence. BT diameters are noted as dbh (diameter at breast height) and are measured approximately 4.5' above ground. Bearings and Distances are measured from the monument to the center of the BT. Bearings and Distances to witness ties were measured with a Sokkia Set 510 Total Station.

ID	Bearing	Distance	Description
(#382)	S13° 32'E	28.7'	24" diameter Red Oak tree.
(#383)	S59° 16'W	21.1'	12" diameter Beech tree.
(#384)	N59° 27'E	18.9'	11" diameter Sugar Maple tree.
(#385)	N06° 09'W	61.3'	30" diameter Beech tree.

MONUMENT ACCESSORIES

Other survey grade monuments that were located in the vicinity and their relation to the monument. Witnesses noted as a Rebar Lite are a 5/8" diameter by 16" polycarbonate rod with a 1-1/2" mag nail in top and yellow plastic cap stamped "MONROE COUNTY WITNESS POINT" set 0.1 foot below grade unless otherwise noted.

Geodetic coordinates in this table are provided in the format Northing, Easting

(#10378)	N47° 39' 51"W	23.75'	N:1487710.7967' E:3100678.4204' Rebar Lite
(#10380)	N31° 03' 32"E	36.95'	N:1487726.4529' E:3100715.0444' Rebar Lite



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us

Page 1 of 3

MONUMENT RECORD

Corner ID: **Wash_D03**

Sixteenth Corner

Section 6- T10N-R01W, 2nd P.M.

Washington Township, Monroe County, Indiana




PHOTO IDENTIFIED: *Photo Date:* 09/03/2025



Photo Orientation & Description: Looking at Wash_D03 from above.



Photo Orientation & Description: Looking northwest at Wash_D03.

EXISTING SURVEY HISTORY *Include as much detail and history of the corner as known at the time of perpetuation*

ORIGINAL GOVERNMENT SURVEY:

This corner was not set in the original government survey.

ORIGINAL CORNER ESTABLISHMENT:

This corner's original establishment was not found in Legal Survey Books. The Stone found this Survey is shown as found on a Survey by Robert Vollmer PLS dated July 8 1987.

OTHER SURVEY HISTORY: *Include details such as surveyor name, date, recording info, monument description, etc.*

DocumentDate	SurveyID	Surveyor	Description	InstrumentNo
7/8/1987	RSID005782	Vollmer, Robert C.	Department of Natural Resources, Morgan-Monroe State Forest Survey	

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND BY THE MONROE COUNTY SURVEYORS OFFICE: *Include, search area or areas, search procedure, etc.*

Date of Field work/Search: 09/03/25 *By:* MES/JMG *Monument Found:* Engraved Stone *BTs or Reference Objects Found:* No, but references established. *Project #* 25-003 *Field Book:* 59 pages 11 & 12 *Notes:*

OTHER EVIDENCE: *Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.*

No visible occupation lines were observed in the area. We reached the location by walking up (North) a trail from the intersection of Burma and Buskirk roads, then walking West a quarter mile to the Stone.

MONUMENT PRESERVATION: *Describe work done to preserve existing monument.*

GPS coordinates were established on the Stone. 2 rebar lites were set within sight of it, that could be used to reestablish its location, should it become obliterated. We also located trees for visual reference. A Steel post with Monroe County Survey marker sign, facing Northeast, was set 0.4' South of the Stone.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us

Page 2 of 3


MONUMENT RECORD

Corner ID: **Wash_D03**

Sixteenth Corner

Section 6- T10N-R01W, 2nd P.M.

Washington Township, Monroe County, Indiana



THEORY OF LOCATION: *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*
The Stone was found. Though it was not found to be documented in Legal Survey books, its location relative to other monuments in the East half of Section 6 Township 10 North Range 1 West leads me to believe it is the original monument set in the original subdivision of the Section and therefore controlling of the original location of the Southeast corner of the Southwest quarter of the Northeast quarter AKA Southwest corner of the Southeast quarter of the Northeast quarter AKA Northeast corner of the Northwest quarter of the Southeast quarter AKA Northwest corner of the Northeast quarter of the Southeast quarter Section 6 Township 10 North Range 1 West, with negligible uncertainty.

GEODETIC COORDINATES: *Northing:* 1487694.8', *Easting:* 3100696.0'

BASIS OF GEODETIC COORDINATES:

The basis of bearings is Grid North NAD83(2011), Indiana West Zone, Epoch 2010.0000, Geoid Model G2012BU7, Datum NAD83_NO_TRANS, US Survey Feet, derived from GPS observations utilizing the Indiana Real-Time Network (INCORS). Coordinate data was collected with a Javad Triumph LS Network Rover and/or with a Sokkia Set 510 Total Station radially from points located with GPS. Distances obtained with GPS have not been adjusted to ground. To adjust grid distances to ground distances multiply them by a scale factor of 1.000035974.

This document is not complete without the associated Corner Perpetuation plat and report of survey for Section 6 Township 10 North Range 1 West by Michael E. Sheppard of the Monroe County Surveyor's Office.

CERTIFICATIONS:



Michael E. Sheppard

Date: 1/20/2026

Michael E. Sheppard

State of Indiana

Professional Surveyor

No. 20100021



Trohn Enright-Randolph

Date: 1/20/2026

Trohn Enright-Randolph

Monroe County Surveyor



Donna K. Smith

Accepted by the Monroe County
Surveyor Review Board on

1/20/2026



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us

Page 3 of 3